
PX0840/B/3M00 Datasheet



Product Name // Overmoulded USB 2.0 Cable PX0840 Series USB Standard A Plug to Sealed B Plug 3m Cable





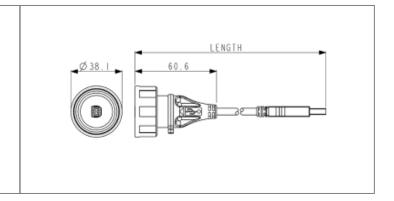

// Product Description:

- Pre-Wired Overmoulded USB 2.0 Cable
- 0 Water and dustproof to IP68 when mated with compatible
- 0 Standard USB 2.0 Type A plug to Sealed Standard USB 2.0 Type B plug
- 3m Cable Length
- O PX0835 Sealing Cap available separately to maintain IP rating of
- Mate with PX08 Standard USB 2.0 Series Panel Mount Connectors

General Information:

Product Display Title:

Product Family:

Product Series:

Change Notes:

Is Vitalis:

Approvals:

Body Colour:

Body Material:

Cable Length:

Contact Type: Coupling Type:

Current Max:

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:**

Rohs Compliant: Voltage Max:

Pre-Wired Overmoulded USB 2.0 Cable

Circular Data Connectors

Standard Buccaneer - USB

PRODUCT-MOQ-ADJUSTMENT

CSA, UL, VDE

Black PVC

3m

Plug Contact

Screw

1A USB 2.0 Standard A Plug to Sealed B Plug

38.1mm

III 94V-0

Flex to Standard Connector Double Ended Cable

IP68, IP69K

+70°C

0°C

4 Contacts

Yes

// Product PDF Links

Standard Series USB conne

// Product 3D CAD Model Links

PX0840/B/3M003D CAD Model