
PX0840/B/5M00 Datasheet



Product Name // Overmoulded USB Cable PX0840 Series **USB Standard A Plug to Sealed B Plug 5M Cable**





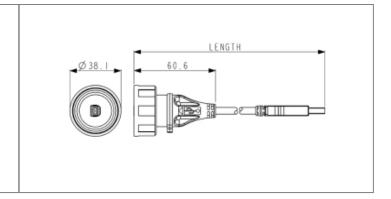

// Product Description:

- 0 Pre-Wired Overmoulded USB V2.0 Cable
- O Water and dustproof to IP68 when mated with compatible connector
- 0 Two versions:
- O Part codes containing /A are Standard USB Type B plug to Sealed Standard USB Type A plug
- O Part codes containing /B are Standard USB Type A plug to Sealed Standard USB Type B plug
- O Choice of cable lengths depending on part code suffix
- O PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PX08 Standard USB Series Panel Mount Connectors

// General Information:

Product Display Title: Pre-Wired Overmoulded USB V2.0 Cable

Product Family: Circular Data Connectors **Product Series:** Standard Buccaneer - USB

PRODUCT-MOQ-ADJUSTMENT Change Notes: Approvals: CSA, UL, VDE

PVC **Body Material:**

Contact Type: Plug Contact Coupling Type: Screw Current Max: USB Standard A Plug to Sealed B Plug Data Cable Type:

Diameter Over Coupling Ring Mm: UL94V-0 Flamability Rating:

Flex to Standard Connector Double Ended Cable Function:

Ip Rating: IP68, IP69K Max Operating Temperature: +70°C Min Operating Temperature: 0°C **Number Of Contacts:** 4 Contacts Rohs Compliant: Yes 30V

// Product PDF Links Standard Series USB connectors...

// Product 3D CAD Model Links PX0840/B/5M003D CAD Model



Voltage Max: