


PX0841/AB/3M00 Datasheet

**Product Name // Overmoulded USB Cable PX0841 Series
USB Sealed A Plug to Sealed B Plug 3M Cable**

[View Product Page](#)

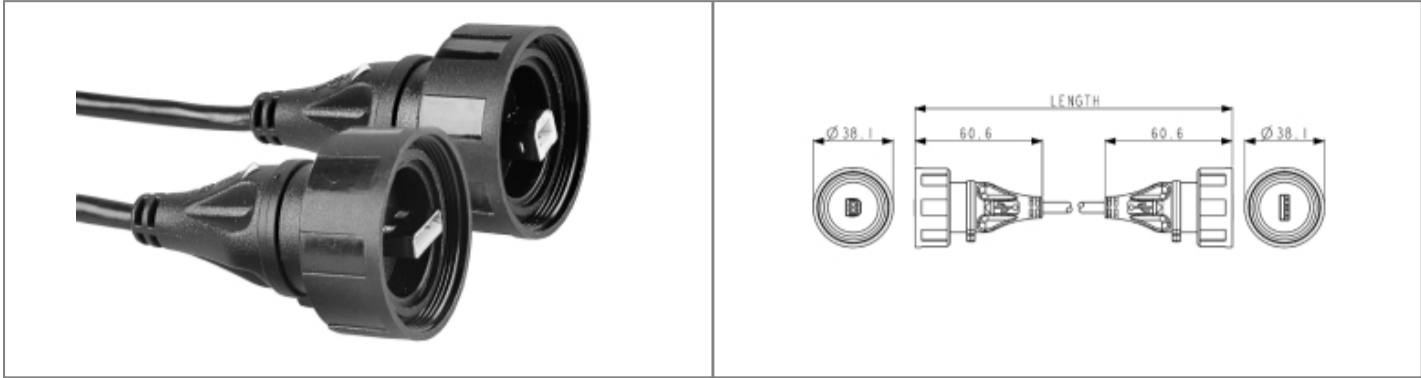

// Product Description:

- ⊕ Pre-Wired Overmoulded USB V2.0 Cable
- ⊕ Water and dustproof to IP68 when mated with compatible connector
- ⊕ Sealed Standard USB Type A plug to Sealed Standard USB Type B plug
- ⊕ Choice of cable lengths depending on part code suffix
- ⊕ PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⊕ Mate with PX08 Standard USB Series Panel Mount Connectors

// General Information:

| | |
|---|---|
| <p>Product Display Title:</p> <p>Product Family:</p> <p>Product Series:</p> <p>Approvals:</p> <p>Body Material:</p> <p>Contact Type:</p> <p>Coupling Type:</p> <p>Current Max:</p> <p>Data Cable Type:</p> <p>Diameter Over Coupling Ring Mm:</p> <p>Flamability Rating:</p> <p>Function:</p> <p>Ip Rating:</p> <p>Max Operating Temperature:</p> <p>Min Operating Temperature:</p> <p>Number Of Contacts:</p> <p>Voltage Max:</p> | <p>Pre-Wired Overmoulded USB V2.0 Cable</p> <p>Circular Data Connectors</p> <p>Standard Buccaneer - USB</p> <p>CSA, UL, VDE</p> <p>PVC</p> <p>Plug Contact</p> <p>Screw</p> <p>1A</p> <p>USB Sealed A Plug to Sealed B Plug</p> <p>38.1mm</p> <p>UL94V-0</p> <p>Flex to Flex Connector Double Ended Cable</p> <p>IP68, IP69K</p> <p>+70°C</p> <p>0°C</p> <p>4 Contacts</p> <p>30V</p> |
|---|---|

// Product PDF Links

[Standard Series USB connectors...](#)

// Product 3D CAD Model Links

[PX0841/AB/3M003D CAD Model](#)