
## PX0857/5M00 Datasheet



# Product Name // Overmould Flex Connector PX0857 Series Pre-Wired Patch Cord IP68 RJ45 to Shielded RJ45 5M Cable

View Product Page



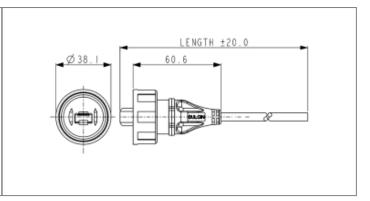

#### // Product Description:

- O Cat 8 specification (25Gbps)
- O Pre-Wired Patch Cord with overmoulded connectoron one end
- Water and dustproof to IP68 when mated with compatible connector
- O Fully shielded system
- S-FTP cable construction

- O PVC jacket cable
- O IP68 RJ45 to RJ45
- Supplied with PX0835 Sealing Cap to maintain IP rating of unmated connectors
- Mate with all PX08 Standard Series RJ45 Panel Mount Connectors

#### // General Information:

Product Display Title:Cat 5e, Cat 6a & Cat 8 OptionsProduct Family:Circular Data ConnectorsProduct Series:Standard Buccaneer - EthernetBody Colour:BlackBody Material:PA

Body Material: PA

Body Material Type: Plastic Body

Cable Length: 5m

Contact Type: Plug Contact

Coupling Type: Screw

Current Max: 1.5A
Data Cable Type: IP68

Data Cable Type:IP68 RJ45 to Shielded RJ45Diameter Over Coupling Ring Mm:38.1mm

Durability: 1200 cycles
Ethernet Category: Cat 8
Flamability Rating: UL94V-2
Function: Flow to Ston

Function: Flex to Standard Connector Double Ended Cable

Ip Rating:IP68, IP69KMax Operating Temperature:+60°CMin Operating Temperature:-20°CNumber Of Contacts:8 ContactsRohs Compliant:Yes

Salt Spray Corrosion Test: EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1

Sheath Colour:BlackSheath Material:PVCVoltage Max:72V

### // Product PDF Links // Product 3D



