
PX0898/3M00 Datasheet



Product Name // Overmould Flex Connector PX0898 Series Pre-Wired Patch Cord IP68 RJ45 to IP68 RJ45 3M Cable





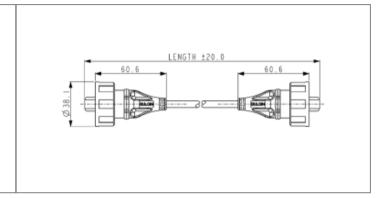

// Product Description:

- O Cat 5e and Cat 6a Options
- O Pre-Wired Patch Cord with overmoulded connector(s)
- O Water and dustproof to IP68 when mated with compatible
- O Supplied with shielded RJ45 plug
- O S-FTP cable construction
- O PUR or PVC jacket cable in a choice of lengths depending on part code suffix
- Choice of:
- O IP68 RJ45 to bare end (part codes prefixed PX0836, PX0896)
- O IP68 RJ45 to Shielded RJ45 (part codes prefixed PX0837, PX0897)
- O IP68 RJ45 to IP68 RJ45 (part codes prefixed PX0838, PX0898)
- PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with all PX08 Standard Series RJ45 Panel Mount Connectors

// General Information:

Product Display Title: Product Family: Product Series: Body Material:

Contact Type: Coupling Type: Current Max:

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function: Ip Rating:

Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max: Cat 5e and Cat 6a Options Circular Data Connectors Standard Buccaneer - Ethernet

PVC Plug Contact Screw 1.5A

IP68 RJ45 to IP68 RJ45

38.1mm UL94V-0

Flex to Flex Connector Double Ended Cable

IP68, IP69K +70°C -20°C 8 Contacts 42V

// Product PDF Links



// Product 3D CAD Model Links

PX0898/3M003D CAD Model

