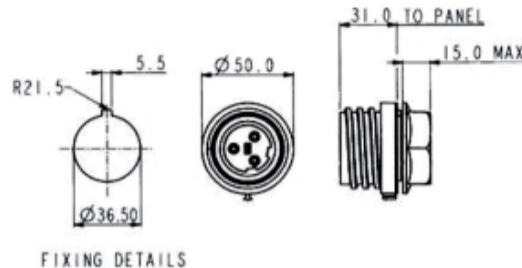


**Product Name // Panel Mount Connector PX0931 Range 3**  
**Contact Socket**
[View Product Page](#)

**// Product Description:**

- ◊ Panel Mount Connector
- ◊ Water and dustproof to IP68 when mated with compatible connector
- ◊ Positive fast-acting locking ring - can be turned with a gloved hand
- ◊ Plug or Socket
- ◊ 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version
- ◊ Single hole fitting, anti-rotation key
- ◊ Panel thickness 3mm-7mm
- ◊ Supplied with high grade sealing gasket
- ◊ PX0970/PX0992 Sealing Cap available separately to maintain IP rating of unmated connectors
- ◊ Mate with PX0911 and PXA911 Series Flex Connectors

**// General Information:**

Product Display Title:	Panel Mount Connector
Product Family:	Circular Power Connectors
Product Series:	900 Series Buccaneer
Approvals:	CSA
Body Material:	Polyamide (PA)
Body Material Type:	Plastic Body
Contact Type:	Socket Contact
Coupling Type:	Screw
Current Max:	30A
Diameter Over Coupling Ring Mm:	58mm
Flamability Rating:	UL94V-0
Function:	Front Panel Mount Connector
Ip Rating:	IP68
Max Contact Accomodation Awg:	14AWG
Min Contact Accomodation Awg:	10AWG
Max Contact Accomodation Mm2:	4mm <sup>2</sup>
Min Contact Accomodation Mm2:	2.5mm <sup>2</sup>
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Number Of Contacts:	3 Contacts
Voltage Max:	600V

**// Product PDF Links**
[PDF 900 Series power connectors...](#)
[PDF 900 Series power connectors wiring...](#)
**// Product 3D CAD Model Links**
[3D CAD PX0931/03/S3D CAD Model](#)

 Have a question or project enquiry  
 you'd like to talk to us about?

[Click Here To Contact Us](#)

Bulgin Datasheets