


PXA921/10/S/08 Datasheet

**Product Name // Inline Cable Connector Large Cable
 PXA921 Range 10 Contact Socket 16mm-18mm Cable
 (White Gland)**

[View Product Page](#)

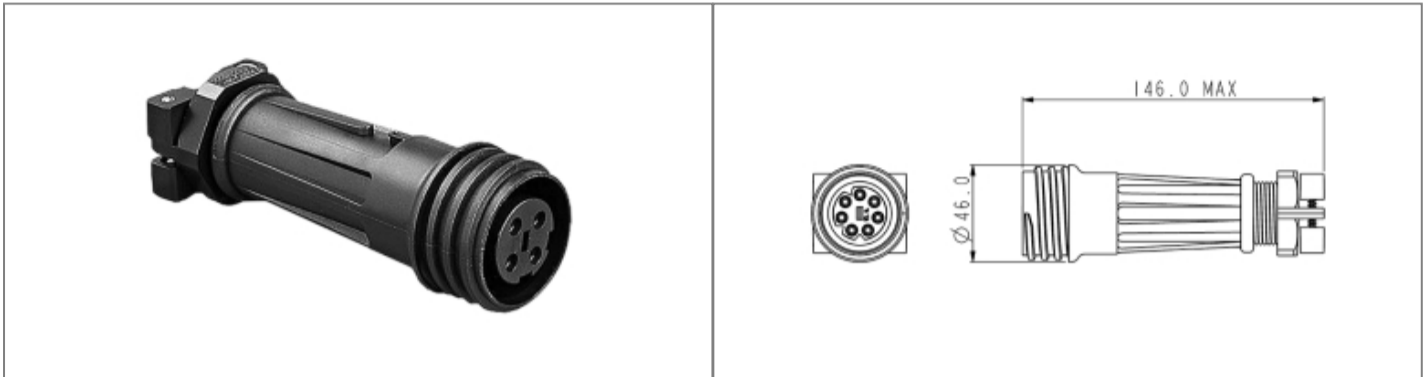

// Product Description:

- ⊞ Inline Cable Connectors
- ⊞ Water and dustproof to IP68 when mated with compatible connector
- ⊞ Positive fast-acting locking ring - can be turned with a gloved hand
- ⊞ Plug or Socket
- ⊞ 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version
- ⊞ Screw Terminals
- ⊞ Choice of cable acceptance 7mm-22mm diameter depending on part code (see data for details):
- ⊞ PX09 part codes 7mm-15mm diameter
- ⊞ PXA9 part codes (large cable version with strain relief clamp) 14mm-22mm diameter
- ⊞ Packs of Cable Glands for differing cable diameters available separately (PX0980, PXA980)
- ⊞ PX0970/PX0991 Sealing Caps available separately to maintain IP rating of unmated connectors
- ⊞ Mate with PX0911 or PXA911 Series Flex Connectors, as appropriate

// General Information:

Product Display Title:	Inline Cable Connectors
Product Family:	Circular Power Connectors
Product Series:	900 Series Buccaneer
Approvals:	UL
Body Material:	Polyamide (PA)
Body Material Type:	Plastic Body
Contact Type:	Socket Contact
Coupling Type:	Screw
Current Max:	10A
Diameter Over Coupling Ring Mm:	58mm
Flamability Rating:	UL94V-0
Function:	Inline Cable Connector
Ip Rating:	IP68
Max Cable Entry Size:	18mm
Min Cable Entry Size:	16mm
Max Contact Accommodation Awg:	18AWG
Min Contact Accommodation Awg:	14AWG
Max Contact Accommodation Mm2:	2.5mm ²
Min Contact Accommodation Mm2:	0.75mm ²
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Number Of Contacts:	10 Contacts
Voltage Max:	250V

// Product PDF Links

[900 Series power connectors...](#)

[900 Series power connectors wiring...](#)

// Product 3D CAD Model Links

[PXA921/10/S/083D CAD Model](#)