
PXEB5200MM4550 Datasheet



Product Name // 2 Channel Plug Connector

View Product Page



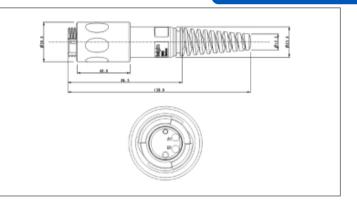

// Product Description:

- Non-terminated Plug Connector for a 2-Channel Multimode
 Cable with 4.5-5mm Diameter
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & OM3
- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- Mates with Plug, Jam Nut, and Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- O Available in 4 Channel

Expanded Beam

O Cable Assembly Available

// General Information:

Contact Type:

Product Display Title:2 Channel Plug ConnectorProduct Family:Circular Fiber ConnectorsProduct Series:5000 Series Expanded BeamMax Insertion Loss:<2dB</td>

Avg Insertion Loss:

4.1.5dB

Body Colour:

Dark Grey

Body Material:

Polycarbo

Body Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Coupling Type: Screw
Diameter Over Coupling Ring Mm: 30mm
Fibre Mode: MM

Fibre Mode: MM
Flamability Rating: UL94V-0
Function: EB Plug Connector
Ip Rating: IP68

Material Finish:

Max Cable Entry Size:

Min Cable Entry Size:

4.5mm

Max Operating Temperature:

H80°C

Min Operating Temperature:

-50°C

// Product PDF Links

Rohs Compliant:





Yes