
# PXEB5200MM5560 Datasheet



## Product Name // 2 Channel Plug Connector





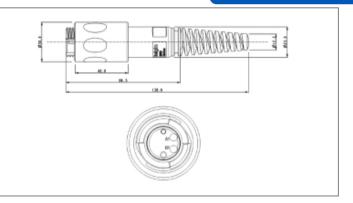

### // Product Description:

- O Non-terminated Plug Connector for a 2-Channel Multimode Cable with 5.5-6mm Diameter
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & OM3
- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- Mates with Plug, Jam Nut, and Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- O Available in 4 Channel
- O Cable Assembly Available

### // General Information:

Product Display Title:2 Channel Plug ConnectorProduct Family:Circular Fiber ConnectorsProduct Series:5000 Series Expanded BeamMax Insertion Loss:<2dB</td>

 Avg Insertion Loss:
 <1.5dB</td>

 Body Colour:
 Dark Grey

 Body Material:
 Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body

Contact Type:Expanded BeamCoupling Type:ScrewDiameter Over Coupling Ring Mm:30mmFibre Mode:MM

Flamability Rating:

Flamability Rating:

UL94V-0

Function:

Ip Rating:

IP68

Material Finish:

Matt

Max Cable Entry Size:

Mill

Max Flamability Rating:

UL94V-0

EB Plug Connector

IP68

Matt

Matt

Matt

Max Cable Entry Size:6mmMin Cable Entry Size:5.5mmMax Operating Temperature:+80°CMin Operating Temperature:-50°CRohs Compliant:Yes

#### // Product PDF Links



// Product 3D CAD Model Links

