
PXEB5201C300 Datasheet



Product Name // 2 Channel Plug to Plug Connector Cable Assembly



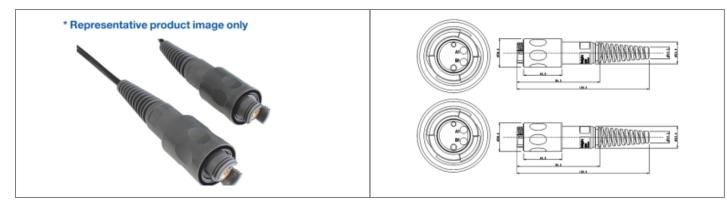

// Product Description:

- 0 Two-terminated Plug Connectors with a 2-Channel OM3 Outdoor Tactical Cable - 300m Long Cable Assembly
- 0 Designed to MIL-DTL83526D
- 0 Compatible with any connector that follows MIL-DTL83526D
- 0 Dust Cap & Lanyard included for each Connector
- 0 Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- 0 Operating Temperature -50°C to +80°C
- 0 Available in 4 Channel
- 0 Available in Plug to LC & Plug to SC Cable Assembly

General Information:

Product Display Title: 2 Channel Plug to Plug Connector Cable Assembly

Product Family: Circular Fiber Connectors **Product Series:** 5000 Series Expanded Beam

Max Insertion Loss: <2dB Avg Insertion Loss: <1.5dB **Body Colour:** Dark Grey

Polycarbonate/Polybutylene Terephthalate (PC/PBT) **Body Material: Body Material Type:**

Contact Type: **Expanded Beam** Coupling Type: Screw Diameter Over Coupling Ring Mm: 30mm

ОМЗ Fibre Mode: Flamability Rating: UL94V-0

Function: EB Plug to Plug Double Ended Fiber Cable Ip Rating:

IP68 Material Finish: Matt +80°C Max Operating Temperature: -50°C

Min Operating Temperature: **Rohs Compliant:** Yes

// Product 3D CAD Model Links

PXEB5201C3003D CAD Model 5000 Series Expanded Beam Product.



// Product PDF Links