
# PXEB5201C450 Datasheet



## Product Name // 2 Channel Plug to Plug Connector Cable

### 🚯 View Product Page

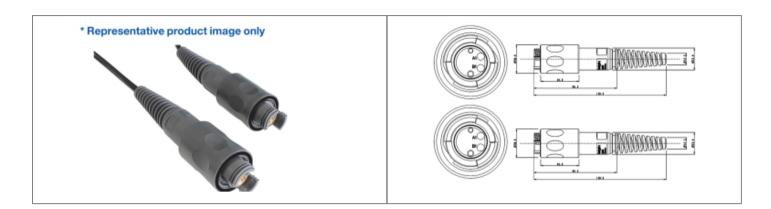

#### // Product Description:

Assembly

- Two-terminated Plug Connectors with a 2-Channel OM3
  Outdoor Tactical Cable 450m Long Cable Assembly
- O Designed to MIL-DTL83526D
- Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap & Lanyard included for each Connector
- O Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- O Operating Temperature -50°C to +80°C
- O Available in 4 Channel
- O Available in Plug to LC & Plug to SC Cable Assembly

#### // General Information:

Product Display Title: **Product Family: Product Series:** Max Insertion Loss: Avg Insertion Loss: Is Vitalis: Body Colour: **Body Material:** Body Material Type: Contact Type: Coupling Type: Diameter Over Coupling Ring Mm: Fibre Mode: Flamability Rating: Function: Ip Rating: Material Finish: Max Operating Temperature: Min Operating Temperature: **Rohs Compliant:** 

2 Channel Plug to Plug Connector Cable Assembly **Circular Fiber Connectors** 5000 Series Expanded Beam <2dB <1.5dB No Dark Grey Polycarbonate/Polybutylene Terephthalate (PC/PBT) Plastic Body Expanded Beam Screw 30mm OM3 UL94V-0 EB Plug to Plug Double Ended Fiber Cable IP68 Matt +80°C -50°C Yes

#### // Product PDF Links

5000 Series Expanded Beam Product...

// Product 3D CAD Model Links

PXEB5201C4503D CAD Model