
PXEB5202B300 Datasheet



Product Name // 2 Channel Plug to LC Connector Cable Assembly





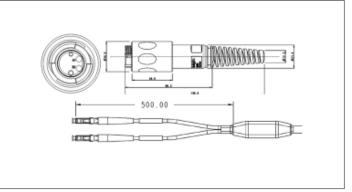

// Product Description:

- A Terminated Plug Connector with a 2-Channel OM1 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with LC Terminations - 300m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Plug Lanyard Included
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- O Available in 4 Channel
- O Available in Plug to Plug & Plug to SC Cable Assembly

// General Information:

Product Display Title: 2 Channel Plug to LC Connector Cable Assembly

 Product Family:
 Circular Fiber Connectors

 Product Series:
 5000 Series Expanded Beam

 Max Insertion Loss:
 <2dB</td>

 Avg Insertion Loss:
 <1.5dB</td>

 Body Colour:
 Dark Grey

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body

Body Material Type:Plastic BodyContact Type:Expanded BeamCoupling Type:Screw

Diameter Over Coupling Ring Mm:30mmFibre Mode:OM1

Flamability Rating: UL94V-0
Function: EB Plug to LC Double Ended Fiber Cable

Ip Rating:IP68Material Finish:MattMax Operating Temperature:+80°C

Max Operating Temperature:+80°CMin Operating Temperature:-50°CRohs Compliant:Yes

// Product PDF Links



// Product 3D CAD Model Links

