


PXEB5202B450 Datasheet

Product Name // 2 Channel Plug to LC Connector Cable Assembly

 [View Product Page](#)

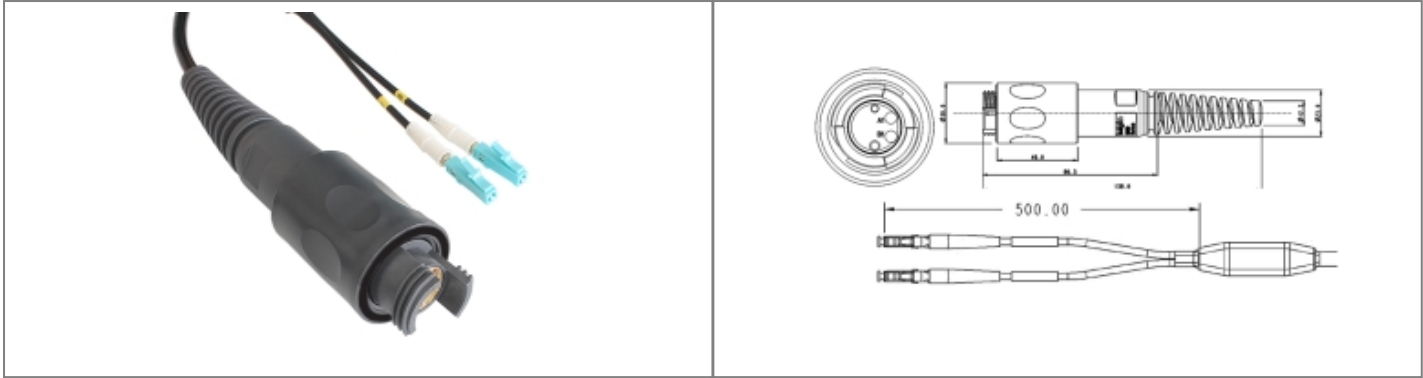

// Product Description:

- ⬢ A Terminated Plug Connector with a 2-Channel OM1 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with LC Terminations - 450m Long Cable Assembly
 - ⬢ Designed to MIL-DTL83526D
 - ⬢ Compatible with any connector that follows MIL-DTL83526D
 - ⬢ Dust Cap for all Connectors & Plug Lanyard Included
- ⬢ Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
 - ⬢ Operating Temperature -50°C to +80°C
 - ⬢ Available in 4 Channel
 - ⬢ Available in Plug to Plug & Plug to SC Cable Assembly

// General Information:

Product Display Title:	2 Channel Plug to LC Connector Cable Assembly
Product Family:	Circular Fiber Connectors
Product Series:	5000 Series Expanded Beam
Max Insertion Loss:	<2dB
Avg Insertion Loss:	<1.5dB
Body Colour:	Dark Grey
Body Material:	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Body Material Type:	Plastic Body
Contact Type:	Expanded Beam
Coupling Type:	Screw
Diameter Over Coupling Ring Mm:	30mm
Fibre Mode:	OM1
Flamability Rating:	UL94V-0
Function:	EB Plug to LC Double Ended Fiber Cable
Ip Rating:	IP68
Material Finish:	Matt
Max Operating Temperature:	+80°C
Min Operating Temperature:	-50°C
Rohs Compliant:	Yes

// Product PDF Links

 [5000 Series Expanded Beam Product...](#)

// Product 3D CAD Model Links

 [PXEB5202B4503D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)