


PXEB5202C010 Datasheet

Product Name // 2 Channel Plug to LC Connector Cable Assembly

[View Product Page](#)

* Representative product image only

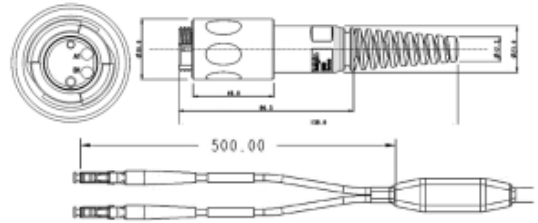

// Product Description:

- ⊞ A Terminated Plug Connector with a 2-Channel OM3 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with LC Terminations - 10m Long Cable Assembly
- ⊞ Designed to MIL-DTL83526D
- ⊞ Compatible with any connector that follows MIL-DTL83526D
- ⊞ Dust Cap for all Connectors & Plug Lanyard Included
- ⊞ Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- ⊞ Operating Temperature -50°C to +80°C
- ⊞ Available in 4 Channel
- ⊞ Available in Plug to Plug & Plug to SC Cable Assembly

// General Information:

| | |
|---------------------------------|---|
| Product Display Title: | 2 Channel Plug to LC Connector Cable Assembly |
| Product Family: | Circular Fiber Connectors |
| Product Series: | 5000 Series Expanded Beam |
| Max Insertion Loss: | <2dB |
| Avg Insertion Loss: | <1.5dB |
| Body Colour: | Dark Grey |
| Body Material: | Polycarbonate/Polybutylene Terephthalate (PC/PBT) |
| Body Material Type: | Plastic Body |
| Contact Type: | Expanded Beam |
| Coupling Type: | Screw |
| Diameter Over Coupling Ring Mm: | 30mm |
| Fibre Mode: | OM3 |
| Flamability Rating: | UL94V-0 |
| Function: | EB Plug to LC Double Ended Fiber Cable |
| Ip Rating: | IP68 |
| Material Finish: | Matt |
| Max Operating Temperature: | +80°C |
| Min Operating Temperature: | -50°C |
| Rohs Compliant: | Yes |

// Product PDF Links

[5000 Series Expanded Beam Product...](#)

// Product 3D CAD Model Links

[PXEB5202C0103D CAD Model](#)


Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)