
PXEB5202C025 Datasheet



Product Name // 2 Channel Plug to LC Connector Cable Assembly





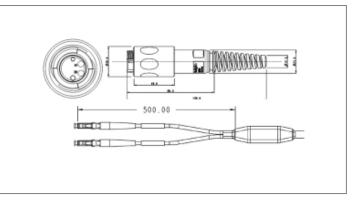

// Product Description:

- A Terminated Plug Connector with a 2-Channel OM3 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with LC Terminations - 25m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Plug Lanyard Included
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 4 Channel
- O Available in Plug to Plug & Plug to SC Cable Assembly

// General Information:

Product Display Title: 2 Channel Plug to LC Connector Cable Assembly

 Product Family:
 Circular Fiber Connectors

 Product Series:
 5000 Series Expanded Beam

Max Insertion Loss: <2dB
Avg Insertion Loss: <1.5dB
Body Colour: Dark Grey

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body

Body Material Type:Plastic BodyContact Type:Expanded BeamCoupling Type:ScrewDiameter Over Coupling Ring Mm:30mm

Fibre Mode: OM3
Flamability Rating: UL94V-0

Function: EB Plug to LC Double Ended Fiber Cable Ip Rating: IP68

Material Finish:

Matt
Max Operating Temperature:

+80°C
Min Operating Temperature:

-50°C

// Product PDF Links

Rohs Compliant:

// Product 3D CAD Model Links

Yes

