
## PXEB5202C200 Datasheet



## Product Name // 2 Channel Plug to LC Connector Cable **Assembly**





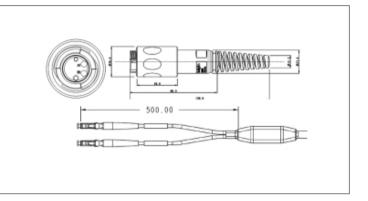

## // Product Description:

- A Terminated Plug Connector with a 2-Channel OM3 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with LC Terminations - 200m Long Cable Assembly
- Designed to MIL-DTL83526D
- 0 Compatible with any connector that follows MIL-DTL83526D
- 0 Dust Cap for all Connectors & Plug Lanyard Included
- 0 Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- 0 Operating Temperature -50°C to +80°C
- 0 Available in 4 Channel
- Available in Plug to Plug & Plug to SC Cable Assembly

## // General Information:

Product Display Title:

**Product Family: Product Series:** 

Max Insertion Loss:

Avg Insertion Loss:

Is Vitalis:

**Body Colour:** 

**Body Material: Body Material Type:** 

Contact Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Fibre Mode:

Flamability Rating: Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Material Finish:

**Rohs Compliant:** 

2 Channel Plug to LC Connector Cable Assembly

Circular Fiber Connectors

5000 Series Expanded Beam

<2dB

<1.5dB

No

Dark Grey

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body

**Expanded Beam** 

Screw 30mm

ОМЗ

UL94V-0

EB Plug to LC Double Ended Fiber Cable

IP68

Matt +80°C

-50°C

Yes

// Product PDF Links

5000 Series Expanded Beam Product..

// Product 3D CAD Model Links



PXEB5202C2003D CAD Model