
PXEB5203C300 Datasheet



Product Name // 2 Channel Plug to SC Connector Cable Assembly



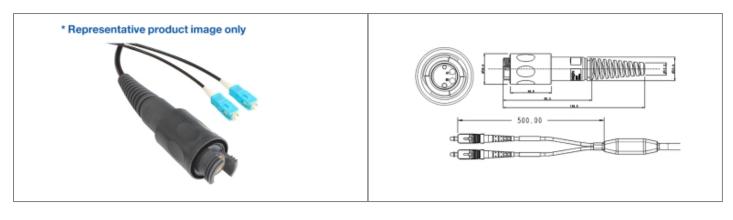

// Product Description:

- A Terminated Plug Connector with a 2-Channel OM3 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with SC Terminations - 300m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Plug Lanyard Included
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 4 Channel
- Available in Plug to Plug & Plug to LC Cable Assembly

// General Information:

Product Display Title: 2 Channel Plug to SC Connector Cable Assembly

 Product Family:
 Circular Fiber Connectors

 Product Series:
 5000 Series Expanded Beam

 Max Insertion Loss:
 <2dB</td>

 Avg Insertion Loss:
 <1.5dB</td>

 Body Colour:
 Dark Grey

Body Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Contact Type: Expanded Beam
Coupling Type: Screw
Diameter Over Coupling Ring Mm: 30mm

Diameter Over Coupling Ring Mm:30mmFibre Mode:OM3Flamability Rating:UL94V

Flamability Rating:

UL94V-0

Function:

EB Plug to SC Double Ended Fiber Cable

Ip Rating:

IP68

Ip Rating:

Material Finish:

Matt

Max Operating Temperature:

Min Operating Temperature:

-50°C

Min Operating Temperature: +80°C
Rohs Compliant: 750°C
Yes



