
## PXEB5210MM4045 Datasheet



## Product Name // 2 Channel Jam Nut Bulkhead Connector with Cable Retention



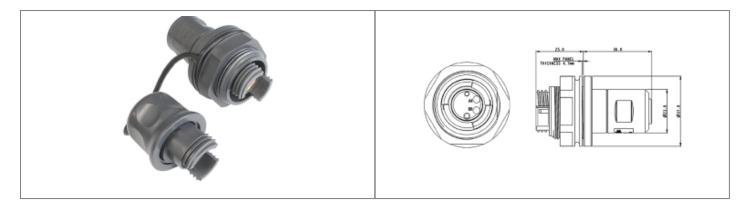

## // Product Description:

- Non-terminated Jam Nut Bulkhead Connector for a 2-Channel Multimode Cable with 4-4.5mm Diameter
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & DM3

- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- O Available in 4 Channel

## // General Information:

Product Display Title: 2 Channel Jam Nut Bulkhead Connector with Cable Retention

Product Family:Circular Fiber ConnectorsProduct Series:5000 Series Expanded Beam

Max Insertion Loss:

Avg Inser

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type:Plastic BodyContact Type:Expanded Beam

 Coupling Nut Retention Force:
 1Nm

 Coupling Type:
 Screw

Diameter Over Coupling Ring Mm:30mmFibre Mode:MMFlamability Rating:UL94V

Function: EB Jam Nut Bulkhead Connector Ip Rating: IP68

Material Finish:MattMax Cable Entry Size:4.5mmMin Cable Entry Size:4mmMax Operating Temperature:+80°CMin Operating Temperature:-50°CMax Panel Thickness:4.7mm

// Product PDF Links

Rohs Compliant:

5000 Series Expanded Beam Product...

// Product 3D CAD Model Links

Yes

PXEB5210MM40453D CAD Model