
## PXEB5210MM5055 Datasheet



# Product Name // 2 Channel Jam Nut Bulkhead Connector with Cable Retention



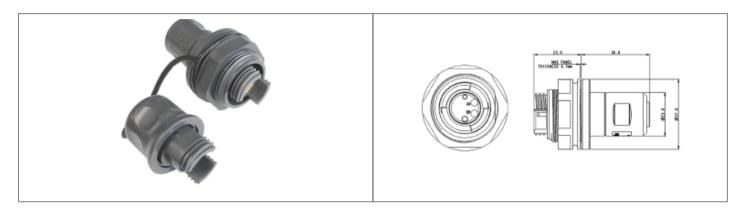

#### // Product Description:

- Non-terminated Jam Nut Bulkhead Connector for a 2-Channel Multimode Cable with 5-5.5mm Diameter
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & DM3

- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- O Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 4 Channel

#### // General Information:

Product Display Title: 2 Channel Jam Nut Bulkhead Connector with Cable Retention

Product Family:Circular Fiber ConnectorsProduct Series:5000 Series Expanded Beam

Max Insertion Loss:<2dB</td>Avg Insertion Loss:<1.5dB</td>Is Vitalis:NoBody Colour:Dark Grey

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type:Plastic BodyContact Type:Expanded BeamCoupling Nut Retention Force:1NmCoupling Type:Screw

Diameter Over Coupling Ring Mm:30mmFibre Mode:MMFlamability Rating:UL94V-0

Function: EB Jam Nut Bulkhead Connector

 Ip Rating:
 IP68

 Material Finish:
 Matt

 Max Cable Entry Size:
 5.5mm

 Min Cable Entry Size:
 5mm

 Max Operating Temperature:
 +80°C

 Min Operating Temperature:
 -50°C

 Max Panel Thickness:
 4.7mm

 Rohs Compliant:
 Yes

### // Product PDF Links



#### // Product 3D CAD Model Links

