
PXEB5220MM Datasheet



Product Name // 2 Channel Flange Mount Bulkhead Connector





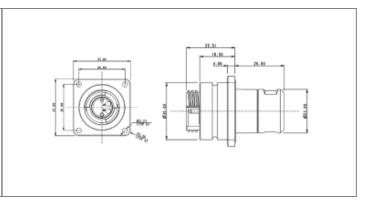

// Product Description:

- Non-terminated Flange Mount Bulkhead Connector for 2 Multimode patch leads
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & OM3
- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 4 Channel
- O Cable Assembly Available

// General Information:

Product Display Title: 2 Channel Flange Mount Bulkhead Connector

Product Family:Circular Fiber ConnectorsProduct Series:5000 Series Expanded Beam

Max Insertion Loss:

Avg Inser

Body Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Contact Type: Expanded Beam Coupling Type: Screw

 Diameter Over Coupling Ring Mm:
 30mm

 Fibre Mode:
 MM

Flamability Rating: UL94V-0
Function: EB Flange Mount Bulkhead Connector

Ip Rating: IP68

Material Finish: Matt

Material Finish:MattMax Operating Temperature:+80°CMin Operating Temperature:-50°CRohs Compliant:Yes

// Product PDF Links // Product 3D CAD Model Links

5000 Series Expanded Beam Product...

