
PXEB5220MM Datasheet



Product Name // 2 Channel Flange Mount Bulkhead Connector





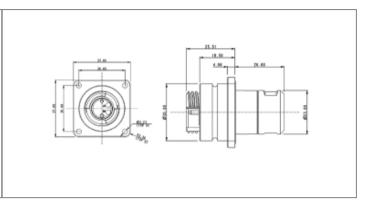

// Product Description:

- Non-terminated Flange Mount Bulkhead Connector for 2 Multimode patch leads
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & OM3
- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- O Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- O Available in 4 Channel
- O Cable Assembly Available

// General Information:

Product Display Title: 2 Channel Flange Mount Bulkhead Connector

Product Family: Circular Fiber Connectors
Product Series: 5000 Series Expanded Beam

Max Insertion Loss: <2dB
Avg Insertion Loss: <1.5dB

 Is Vitalis:
 No

 Body Colour:
 Dark Grey

 Body Material:
 Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body

Contact Type: Expanded Beam
Coupling Type: Screw
Diameter Over Coupling Ring Mm: 30mm

Fibre Mode: MM Flamability Rating: UL94V-0

Function: EB Flange Mount Bulkhead Connector

Ip Rating:

Ip Rating:

Ip68

Material Finish:

Matt

Material Finish:MattMax Operating Temperature:+80°CMin Operating Temperature:-50°CRohs Compliant:Yes

// Product PDF Links



// Product 3D CAD Model Links

