
PXEB5220MM4045 Datasheet



Product Name // 2 Channel Flange Mount Bulkhead **Connector with Cable Retention**





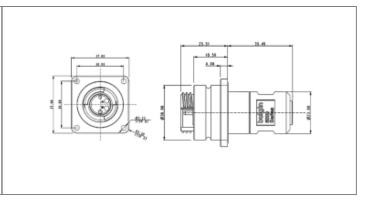

// Product Description:

- O Non-terminated Flange Mount Bulkhead Connector for a 2-Channel Multimode Cable with 4-4.5mm Diameter
- 0 Designed to MIL-DTL83526D
- 0 Compatible with any connector that follows MIL-DTL83526D
- Compatible with OM1 & DM3

- \bigcirc Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- 0 Mates with Plug Connectors (hermaphroditic)
- 0 Operating Temperature -50°C to +80°C
- Available in 4 Channel

General Information:

Product Display Title: 2 Channel Flange Mount Bulkhead Connector with Cable Retention

Product Family: Circular Fiber Connectors 5000 Series Expanded Beam **Product Series:**

Max Insertion Loss: <2dR Avg Insertion Loss: <1.5dB **Body Colour:** Dark Grey

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body Contact Type: Expanded Beam Coupling Type: Screw 30mm Diameter Over Coupling Ring Mm:

Fibre Mode: MM Flamability Rating: UL94V-0

Function: EB Flange Mount Bulkhead Connector IP68 Ip Rating:

Material Finish: Matt 4.5mm Max Cable Entry Size: Min Cable Entry Size: 4mm +80°C Max Operating Temperature: -50°C

Min Operating Temperature: **Rohs Compliant:** Yes

// Product PDF Links

5000 Series Expanded Beam Product..

// Product 3D CAD Model Links

PXEB5220MM40453D CAD Model