
## PXEB5220MM4045 Datasheet



## Product Name // 2 Channel Flange Mount Bulkhead Connector with Cable Retention





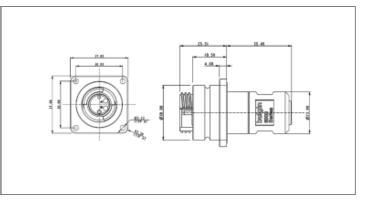

## // Product Description:

- O Non-terminated Flange Mount Bulkhead Connector for a 2-Channel Multimode Cable with 4-4 5mm Diameter
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- Compatible with OM1 & OM3

- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 4 Channel

## // General Information:

Product Display Title: 2 Channel Flange Mount Bulkhead Connector with Cable Retention

Product Family:Circular Fiber ConnectorsProduct Series:5000 Series Expanded Beam

Max Insertion Loss: <2dB
Avg Insertion Loss: <1.5dB
Body Colour: Dark Grey

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type:Plastic BodyContact Type:Expanded BeamCoupling Type:Screw

Diameter Over Coupling Ring Mm: 30mm
Fibre Mode: MM

Flamability Rating: UL94V-0
Function: EB Flange Mount Bulkhead Connector
Ip Rating: IP68

 Material Finish:
 Matt

 Max Cable Entry Size:
 4.5mm

 Min Cable Entry Size:
 4mm

 Max Operating Temperature:
 +80°C

 Min Operating Temperature:
 -50°C

// Product PDF Links

**Rohs Compliant:** 

5000 Series Expanded Beam Product...

// Product 3D CAD Model Links

Yes

PXEB5220MM40453D CAD Model