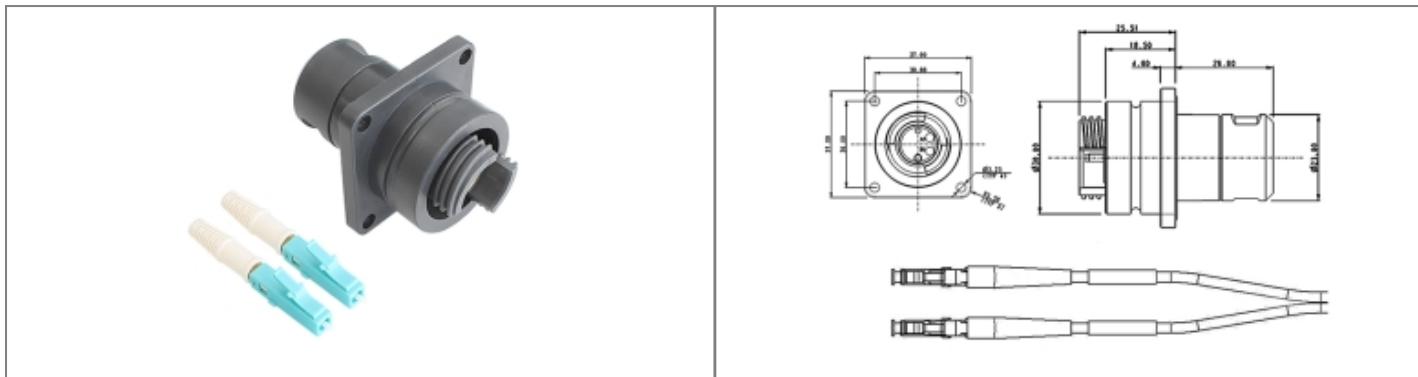


Product Name // 2 Channel Flange Mount to LC Connector Cable Assembly
[View Product Page](#)

// Product Description:

- ◊ A Terminated Flange Mount Bulkhead (FMBH) Connector with 2 (OM1) LC terminated independent cables - 2m Long Cable Assembly
- ◊ Designed to MIL-DTL83526D
- ◊ Compatible with any connector that follows MIL-DTL83526D
- ◊ Dust Cap for all Connectors & Flange Mount Lanyard Included
- ◊ Mates with Plug Connectors (hermaphroditic)
- ◊ Operating Temperature -50°C to +80°C
- ◊ Available in 2 Channel
- ◊ Available in Flange Mount to SC Cable Assembly

// General Information:

Product Display Title:	2 Channel Flange Mount to LC Connector Cable Assembly
Product Family:	Circular Fiber Connectors
Product Series:	5000 Series Expanded Beam
Max Insertion Loss:	<2dB
Avg Insertion Loss:	<1.5dB
Body Colour:	Dark Grey
Body Material:	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Body Material Type:	Plastic Body
Contact Type:	Expanded Beam
Coupling Type:	Screw
Diameter Over Coupling Ring Mm:	30mm
Fibre Mode:	OM1
Flamability Rating:	UL94V-0
Function:	EB Flange Mount to LC Double Ended Fiber Cable
Ip Rating:	IP68
Material Finish:	Matt
Max Operating Temperature:	+80°C
Min Operating Temperature:	-50°C
Rohs Compliant:	Yes

// Product PDF Links
 5000 Series Expanded Beam Product...

// Product 3D CAD Model Links
 PXEB5222B0023D CAD Model...