
PXEB5400MM4045 Datasheet



Product Name // 4 Channel Plug Connector





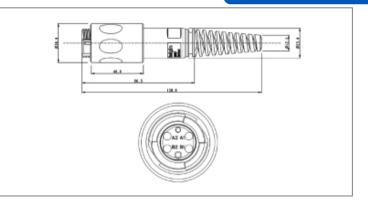

// Product Description:

- O Non-terminated Plug Connector for a 4-Channel Multimode Cable with 4-4.5mm Diameter
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & OM3
- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- Mates with Plug, Jam Nut, and Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- O Cable Assembly Available

// General Information:

Product Display Title:

4 Channel Plug Connector
Product Family:
Circular Fiber Connectors
Product Series:
5000 Series Expanded Beam
Max Insertion Loss:
<2dB

 Avg Insertion Loss:
 <1.5dB</td>

 Body Colour:
 Dark Grey

 Body Material:
 Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body

 Contact Type:
 Expanded Beam

 Coupling Type:
 Screw

 Diameter Over Coupling Ring Mm:
 30mm

Fibre Mode: MM
Flamability Rating: UL94V-0
Function: EB Plug Connector

Ip Rating:IP68Material Finish:MattMax Cable Entry Size:4.5mmMin Cable Entry Size:4mmMax Operating Temperature:+80°CMin Operating Temperature:-50°C

// Product PDF Links
5000 Series Expanded Beam Product...

Rohs Compliant:

// Product 3D CAD Model Links

PXEB5400MM40453D CAD Model

Yes