
PXEB5400MM5560 Datasheet



Product Name // 4 Channel Plug Connector





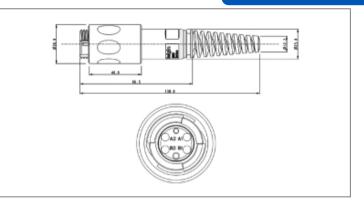

// Product Description:

- Non-terminated Plug Connector for a 4-Channel Multimode Cable with 5.5-6mm Diameter
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & OM3
- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- Mates with Plug, Jam Nut, and Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- O Available in 2 Channel
- O Cable Assembly Available

// General Information:

Product Display Title:4 Channel Plug ConnectorProduct Family:Circular Fiber ConnectorsProduct Series:5000 Series Expanded BeamMax Insertion Loss:<2dB</td>

Avg Insertion Loss: <1.5dB
Is Vitalis: No
Body Colour: Dark Grey
Body Material: Polycarbo

Body Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic BodyContact Type:Expanded Beam

Coupling Type: Expanded Be Screw

Diameter Over Coupling Ring Mm:30mmFibre Mode:MMFlamability Rating:UL94V-0

Function: EB Plug Connector

 Ip Rating:
 IP68

 Material Finish:
 Matt

 Max Cable Entry Size:
 6mm

 Min Cable Entry Size:
 5.5mm

 Max Operating Temperature:
 +80°C

Max Operating Temperature:
Min Operating Temperature:
Rohs Compliant:

// Product 3D CAD Model Links

-50°C

Yes

PXEB5400MM55603D CAD Model

// Product PDF Links



