
PXEB5400MM5560 Datasheet



Product Name // 4 Channel Plug Connector





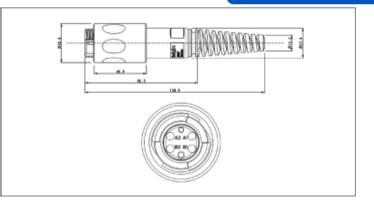

// Product Description:

- 0 Non-terminated Plug Connector for a 4-Channel Multimode Cable with 5.5-6mm Diameter
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- 0 Compatible with OM1 & OM3
- 0 Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- 0 Mates with Plug, Jam Nut, and Flange Mount Connectors (hermaphroditic)
- 0 Operating Temperature -50°C to +80°C
- 0 Available in 2 Channel
- 0 Cable Assembly Available

// General Information:

Product Display Title: 4 Channel Plug Connector **Product Family:** Circular Fiber Connectors **Product Series:** 5000 Series Expanded Beam Max Insertion Loss: <2dB

<1.5dB Ava Insertion Loss: **Body Colour:** Dark Grey **Body Material:** Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body Contact Type: **Expanded Beam** Coupling Type: Screw

Diameter Over Coupling Ring Mm: 30mm Fibre Mode: MM

Flamability Rating: UL94V-0 Function: **EB Plug Connector** Ip Rating: IP68 Material Finish: Matt 6mm

Max Cable Entry Size: Min Cable Entry Size: 5.5mm Max Operating Temperature: Min Operating Temperature: -50°C Rohs Compliant: Yes

// Product 3D CAD Model Links

+80°C

5000 Series Expanded Beam Product... PXEB5400MM55603D CAD Model



// Product PDF Links