
PXEB5401B100 Datasheet



Product Name // 4 Channel Plug to Plug Connector Cable Assembly





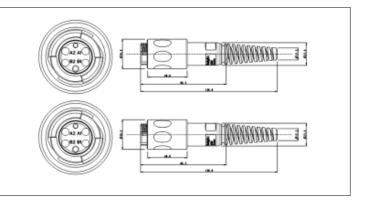

// Product Description:

- Two-terminated Plug Connectors with a 4-Channel OM1
 Outdoor Tactical Cable 100m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap & Lanyard included for each Connector
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- O Available in Plug to LC & Plug to SC Cable Assembly

// General Information:

Product Display Title: 4 Channel Plug to Plug Connector Cable Assembly

 Product Family:
 Circular Fiber Connectors

 Product Series:
 5000 Series Expanded Beam

Max Insertion Loss: <2dB
Avg Insertion Loss: <1.5dB

Body Colour: Dark Grey

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body
Contact Type: Expanded Beam
Coupling Type: Screw

Diameter Over Coupling Ring Mm: 30mm
Fibre Mode: OM1

Flamability Rating: UL94V-0

Function: EB Plug to Plug Double Ended Fiber Cable

Ip Rating:IP68Material Finish:MattMax Operating Temperature:+80°C

Max Operating Temperature: +80°C
Min Operating Temperature: -50°C
Rohs Compliant: Yes

// Product PDF Links // Product 3D CAD Model Links



