
# PXEB5401B200 Datasheet



## **Product Name // 4 Channel Plug to Plug Connector Cable Assembly**





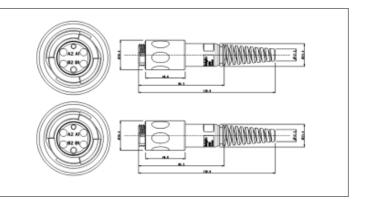

### // Product Description:

- 0 Two-terminated Plug Connectors with a 4-Channel OM1 Outdoor Tactical Cable - 200m Long Cable Assembly
- 0 Designed to MIL-DTL83526D
- 0 Compatible with any connector that follows MIL-DTL83526D
- 0 Dust Cap & Lanyard included for each Connector
- 0 Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- 0 Operating Temperature -50°C to +80°C
- 0 Available in 2 Channel
- 0 Available in Plug to LC & Plug to SC Cable Assembly

#### **General Information:**

**Product Display Title:** 4 Channel Plug to Plug Connector Cable Assembly

**Product Family:** Circular Fiber Connectors **Product Series:** 5000 Series Expanded Beam

Max Insertion Loss: <2dB Avg Insertion Loss: <1.5dB **Body Colour:** Dark Grey

Polycarbonate/Polybutylene Terephthalate (PC/PBT) **Body Material:** 

**Body Material Type:** Contact Type: **Expanded Beam** Coupling Type: Screw

Diameter Over Coupling Ring Mm: 30mm OM1 Fibre Mode:

Flamability Rating: UL94V-0 Function: EB Plug to Plug Double Ended Fiber Cable

Ip Rating: IP68 Material Finish: Matt +80°C Max Operating Temperature:

Min Operating Temperature: -50°C **Rohs Compliant:** Yes

#### // Product PDF Links // Product 3D CAD Model Links

5000 Series Expanded Beam Product.

PXEB5401B2003D CAD Model