
PXEB5401B300 Datasheet



Product Name // 4 Channel Plug to Plug Connector Cable Assembly





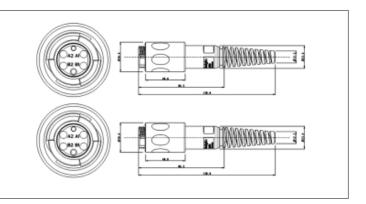

// Product Description:

- Two-terminated Plug Connectors with a 4-Channel OM1 Outdoor Tactical Cable - 300m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap & Lanyard included for each Connector
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- O Available in Plug to LC & Plug to SC Cable Assembly

// General Information:

Product Display Title: 4 Channel Plug to Plug Connector Cable Assembly

Product Family:Circular Fiber ConnectorsProduct Series:5000 Series Expanded Beam

Max Insertion Loss:<2dB</th>Avg Insertion Loss:<1.5dB</th>

 Body Colour:
 Dark Grey

 Body Material:
 Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body
Contact Type: Expanded Beam
Coupling Type: Screw

Diameter Over Coupling Ring Mm: 30mm
Fibre Mode: OM1

Flamability Rating: UL94V-0
Function: EB Plug to Plug Double Ended Fiber Cable

Ip Rating: IP68

Material Finish: Matt

Max Operating Temperature: +80°C

Max Operating Temperature:+80°CMin Operating Temperature:-50°CRohs Compliant:Yes

// Product 3D CAD Model Links

5000 Series Expanded Beam Product... PXEB5401B3003D CAD Model

// Product PDF Links