
PXEB5401C015 Datasheet



Product Name // 4 Channel Plug to Plug Connector Cable Assembly





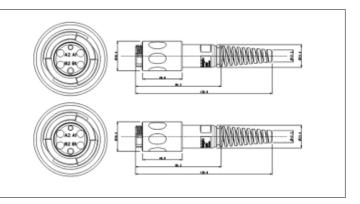

// Product Description:

- 0 Two-terminated Plug Connectors with a 4-Channel OM3 Outdoor Tactical Cable - 15m Long Cable Assembly
- 0 Designed to MIL-DTL83526D
- 0 Compatible with any connector that follows MIL-DTL83526D
- 0 Dust Cap & Lanyard included for each Connector
- 0 Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- 0 Operating Temperature -50°C to +80°C
- 0 Available in 2 Channel
- 0 Available in Plug to LC & Plug to SC Cable Assembly

General Information:

Product Display Title: 4 Channel Plug to Plug Connector Cable Assembly

Product Family: Circular Fiber Connectors

Product Series: 5000 Series Expanded Beam Max Insertion Loss: <2dB Avg Insertion Loss: <1.5dB

Body Colour: Dark Grey Polycarbonate/Polybutylene Terephthalate (PC/PBT) **Body Material:**

Body Material Type: Expanded Beam

Contact Type: Coupling Type: Screw Diameter Over Coupling Ring Mm: 30mm

Flamability Rating: UL94V-0

Function: EB Plug to Plug Double Ended Fiber Cable IP68 Ip Rating:

Material Finish: Matt +80°C Max Operating Temperature: Min Operating Temperature: -50°C

Rohs Compliant: Yes

// Product PDF Links

Fibre Mode:





ОМЗ