
PXEB5401C300 Datasheet



Product Name // 4 Channel Plug to Plug Connector Cable Assembly





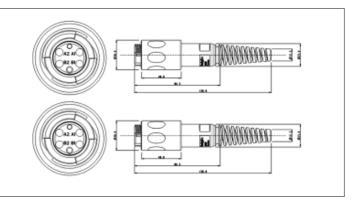

// Product Description:

- Two-terminated Plug Connectors with a 4-Channel OM3 Outdoor Tactical Cable - 300m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap & Lanyard included for each Connector
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- O Available in Plug to LC & Plug to SC Cable Assembly

// General Information:

Product Display Title: 4 Channel Plug to Plug Connector Cable Assembly

Product Family:Circular Fiber ConnectorsProduct Series:5000 Series Expanded Beam

Max Insertion Loss: <2dB
Avg Insertion Loss: <1.5dB

Body Colour:Dark GreyBody Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Contact Type: Expanded Beam
Coupling Type: Screw

Diameter Over Coupling Ring Mm: 30mm
Fibre Mode: OM3

Flamability Rating: UL94V-0
Function: EB Plug to Plug Double Ended Fiber Cable

Function: EB Plug to Plug Double Ended Fiber Cable lp Rating: IP68

Material Finish: Matt
Max Operating Temperature: +80°C
Min Operating Temperature: -50°C

// Product PDF Links

5000 Series Expanded Beam Product...

Rohs Compliant:



Yes

