

PXEB5402B050 Datasheet



Product Name // 4 Channel Plug to LC Connector Cable Assembly



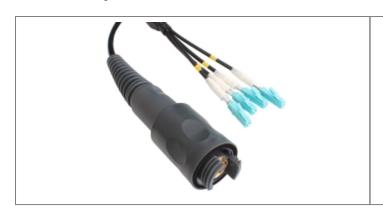



// Product Description:

- A Terminated Plug Connector with a 4-Channel OM1 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with LC Terminations - 50m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Plug Lanyard Included
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- O Available in 2 Channel
- O Available in Plug to Plug & Plug to SC Cable Assembly

// General Information:

Product Display Title: 4 Channel Plug to LC Connector Cable Assembly

 Product Family:
 Circular Fiber Connectors

 Product Series:
 5000 Series Expanded Beam

Max Insertion Loss: <2dB
Avg Insertion Loss: <1.5dB
Body Colour: Dark Grey

Body Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Contact Type: Expanded Beam
Coupling Type: Screw

Diameter Over Coupling Ring Mm:30mmFibre Mode:OM1

Flamability Rating: UL94V-0
Function: EB Plug to LC Double Ended Fiber Cable

Ip Rating:IP68Material Finish:MattMax Operating Temperature:+80°C

Min Operating Temperature:
-50°C
Rohs Compliant:
Yes

// Product PDF Links

5000 Series Expanded Beam Product...

// Product 3D CAD Model Links

PXEB5402B0503D CAD Model