
## PXEB5402B200 Datasheet



## Product Name // 4 Channel Plug to LC Connector Cable **Assembly**





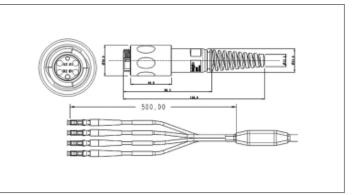

## // Product Description:

- A Terminated Plug Connector with a 4-Channel OM1 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with LC Terminations - 200m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Plug Lanyard Included
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- 0 Operating Temperature -50°C to +80°C
- 0 Available in 2 Channel
- O Available in Plug to Plug & Plug to SC Cable Assembly

## // General Information:

**Product Display Title:** 4 Channel Plug to LC Connector Cable Assembly

**Product Family:** Circular Fiber Connectors **Product Series:** 5000 Series Expanded Beam

Max Insertion Loss: <2dB Avg Insertion Loss: <1.5dB **Body Colour:** Dark Grev

**Body Material:** Polycarbonate/Polybutylene Terephthalate (PC/PBT)

**Body Material Type:** Plastic Body Contact Type: Expanded Beam Screw Coupling Type:

30mm Diameter Over Coupling Ring Mm: OM1 Fibre Mode:

Flamability Rating: UL94V-0 Function: EB Plug to LC Double Ended Fiber Cable

IP68 Ip Rating: Material Finish: Matt +80°C Max Operating Temperature:

Min Operating Temperature: -50°C **Rohs Compliant:** Yes

// Product PDF Links // Product 3D CAD Model Links

5000 Series Expanded Beam Product. PXEB5402B2003D CAD Model



