
## PXEB5403B200 Datasheet



## Product Name // 4 Channel Plug to SC Connector Cable Assembly





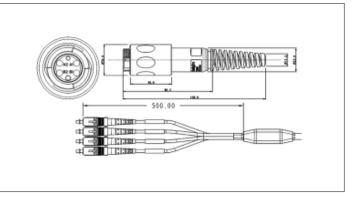

## // Product Description:

- A Terminated Plug Connector with a 4-Channel OM1 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with SC Terminations - 200m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Plug Lanyard Included
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- O Available in 2 Channel
- O Available in Plug to Plug & Plug to LC Cable Assembly

## // General Information:

Product Display Title: 4 Channel Plug to SC Connector Cable Assembly

 Product Family:
 Circular Fiber Connectors

 Product Series:
 5000 Series Expanded Beam

Max Insertion Loss: <2dB
Avg Insertion Loss: <1.5dB
Body Colour: Dark Grey

Body Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Contact Type: Expanded Beam
Coupling Type: Screw
Diameter Over Coupling Ring Mm: 30mm

Diameter Over Coupling Ring Mm: 30mm
Fibre Mode: OM1

Flamability Rating: UL94V-0
Function: EB Plug to SC Double Ended Fiber Cable

Ip Rating: IP68
Material Finish: Matt
Max Operating Temperature: +80°C

Max Operating Temperature:+80°CMin Operating Temperature:-50°CRohs Compliant:Yes

// Product PDF Links // Product 3D CAD Model Links

5000 Series Expanded Beam Product...

PXEB5403B20

PXEB5403B2003D CAD Model