
PXEB5403C010 Datasheet



Product Name // 4 Channel Plug to SC Connector Cable Assembly



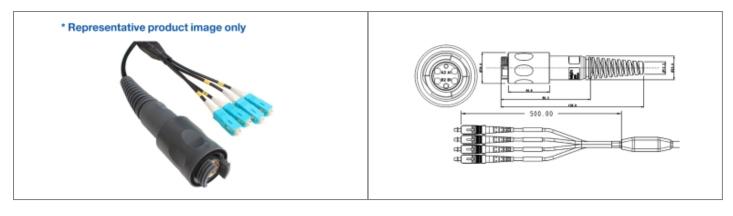

// Product Description:

- A Terminated Plug Connector with a 4-Channel OM3 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with SC Terminations - 10m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Plug Lanyard Included
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- O Available in 2 Channel
- O Available in Plug to Plug & Plug to LC Cable Assembly

// General Information:

Product Display Title: 4 Channel Plug to SC Connector Cable Assembly

 Product Family:
 Circular Fiber Connectors

 Product Series:
 5000 Series Expanded Beam

Max Insertion Loss: <2dB
Avg Insertion Loss: <1.5dB
Body Colour: Dark Grey

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body

Body Material Type:Plastic BodyContact Type:Expanded BeamCoupling Type:ScrewDiameter Over Coupling Ring Mm:30mm

Fibre Mode: OM3
Flamphility Rating: UII 94V-0

Flamability Rating: UL94V-0
Function: EB Plug to SC Double Ended Fiber Cable

Ip Rating:IP68Material Finish:MattMax Operating Temperature:+80°C

Max Operating Temperature: +80°C
Min Operating Temperature: -50°C
Rohs Compliant: Yes

// Product 3D CAD Model Links

5000 Series Expanded Beam Product... PXEB5403C0103D CAD Model

// Product PDF Links