
## PXEB5403C025 Datasheet



## Product Name // 4 Channel Plug to SC Connector Cable Assembly



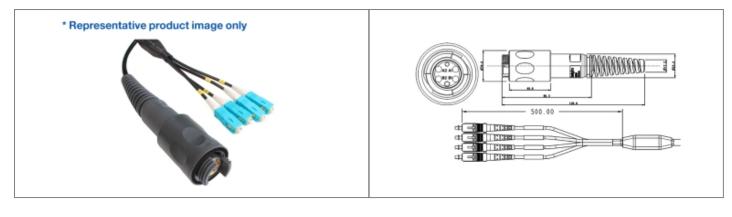

## // Product Description:

- A Terminated Plug Connector with a 4-Channel OM3 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with SC Terminations - 25m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Plug Lanyard Included
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- Available in Plug to Plug & Plug to LC Cable Assembly

## // General Information:

Product Display Title: 4 Channel Plug to SC Connector Cable Assembly

Product Family: Circular Fiber Connectors
Product Series: 5000 Series Expanded Beam

Max Insertion Loss: <2dB

Avg Insertion Loss: <1.5dB

Body Colour: Dark Grey

Body Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Contact Type: Expanded Beam
Coupling Type: Screw
Diameter Over Coupling Ring Mm: 30mm

Fibre Mode: OM3
Flamability Rating: UL94V-0

Function: EB Plug to SC Double Ended Fiber Cable

Ip Rating: IP68

Material Finish: Matt
Max Operating Temperature: +80°C
Min Operating Temperature: -50°C



**Rohs Compliant:** 



Yes