
PXEB5403C050 Datasheet

Product Name // 4 Channel Plug to SC Connector Cable

🚯 View Product Page

<u>bulg</u>in

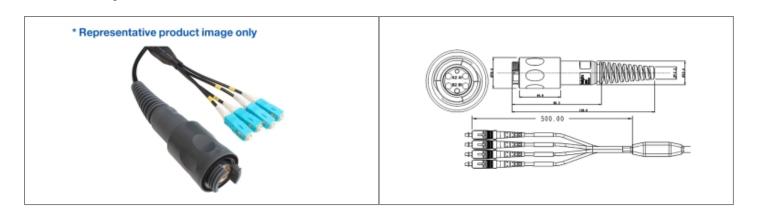

// Product Description:

Assembly

- A Terminated Plug Connector with a 4-Channel OM3 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with SC Terminations - 50m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Plug Lanyard Included
- O Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- O Available in 2 Channel
- O Available in Plug to Plug & Plug to LC Cable Assembly

// General Information:

Product Display Title: Product Family: Product Series: Max Insertion Loss: Avg Insertion Loss: Body Colour: **Body Material:** Body Material Type: Contact Type: Coupling Type: Diameter Over Coupling Ring Mm: Fibre Mode: Flamability Rating: Function: Ip Rating: Material Finish: Max Operating Temperature: Min Operating Temperature: **Rohs Compliant:**

4 Channel Plug to SC Connector Cable Assembly Circular Fiber Connectors 5000 Series Expanded Beam <2dB <1.5dB Dark Grev Polycarbonate/Polybutylene Terephthalate (PC/PBT) Plastic Body Expanded Beam Screw 30mm OM3 UL94V-0 EB Plug to SC Double Ended Fiber Cable IP68 Matt +80°C -50°C Yes

// Product PDF Links

5000 Series Expanded Beam Product...

// Product 3D CAD Model Links

PXEB5403C0503D CAD Model

Have a question or project enquiry you'd like to talk to us about?