
PXEB5410MM Datasheet



Product Name // 4 Channel Jam Nut Bulkhead Connector





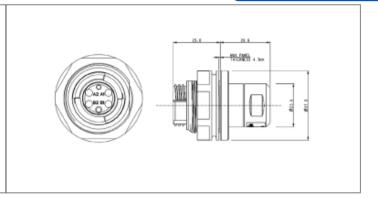

// Product Description:

- O Non-terminated Jam Nut Bulkhead Connector for 4 Multimode patch leads
- 0 Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & OM3
- 0 Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- Mates with Plug Connectors (hermaphroditic)
- 0 Operating Temperature -50°C to +80°C
- O Available in 2 Channel
- 0 Cable Assembly Available

General Information:

Product Display Title: 4 Channel Jam Nut Bulkhead Connector

Product Family: Circular Fiber Connectors 5000 Series Expanded Beam **Product Series:**

Max Insertion Loss: <2dB <1.5dB Avg Insertion Loss:

Is Vitalis: **Body Colour:** Dark Grev Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body

Contact Type: Expanded Beam 1Nm Coupling Nut Retention Force:

Coupling Type: Screw Diameter Over Coupling Ring Mm: 30mm

Fibre Mode: MM Flamability Rating: UL94V-0

Function: EB Jam Nut Bulkhead Connector IP68 Ip Rating:

Material Finish: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: Rohs Compliant:

Matt

+80°C -50°C 4.7mm

// Product PDF Links



// Product 3D CAD Model Links

