
PXEB5410MM Datasheet



Product Name // 4 Channel Jam Nut Bulkhead Connector

View Product Page



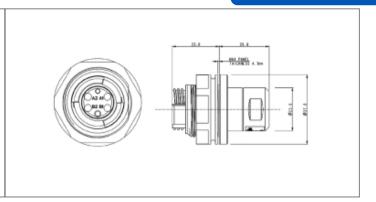

// Product Description:

- Non-terminated Jam Nut Bulkhead Connector for 4 Multimode patch leads
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & OM3
- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- Q Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- O Cable Assembly Available

// General Information:

Product Display Title: 4 Channel Jam Nut Bulkhead Connector

Product Family:Circular Fiber ConnectorsProduct Series:5000 Series Expanded Beam

Max Insertion Loss:<2dB</td>Avg Insertion Loss:<1.5dB</td>Body Colour:Dark Grey

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Body Material Type: Plastic Body

Contact Type: Expanded Beam
Coupling Nut Retention Force: 1Nm

Coupling Type: Screw
Diameter Over Coupling Ring Mm: 30mm

Diameter Over Coupling Ring Mm:30mmFibre Mode:MMFlamability Rating:UL94V-0

Flamability Hating: 01.94V-0

Function: EB Jam Nut Bulkhead Connector Ip Rating: IP68

Material Finish:MattMax Operating Temperature:+80°CMin Operating Temperature:-50°CMax Panel Thickness:4.7mm

// Product 3D CAD Model Links

5000 Series Expanded Beam Product... PXEB5410MM3D CAD Model



Rohs Compliant:

// Product PDF Links

Yes