
PXEB5410MM4045 Datasheet



Product Name // 4 Channel Jam Nut Bulkhead Connector with Cable Retention



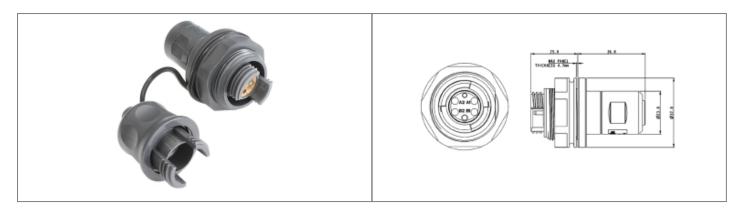

// Product Description:

- Non-terminated Jam Nut Bulkhead Connector for a 4-Channel Multimode Cable with 4-4.5mm Diameter
- 0 Designed to MIL-DTL83526D
- 0 Compatible with any connector that follows MIL-DTL83526D
- Compatible with OM1 & DM3

- Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- O Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- 0 Available in 2 Channel

// General Information:

Product Display Title: 4 Channel Jam Nut Bulkhead Connector with Cable Retention

Product Family: Circular Fiber Connectors 5000 Series Expanded Beam **Product Series:**

Max Insertion Loss: <2dB Avg Insertion Loss: <1.5dB Dark Grey **Body Colour: Body Material:** Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body

Contact Type: Expanded Beam **Coupling Nut Retention Force:** 1Nm

Coupling Type: Screw Diameter Over Coupling Ring Mm: 30mm Fibre Mode: MM

Flamability Rating: EB Jam Nut Bulkhead Connector Function: IP68 Ip Rating:

Material Finish: Matt Max Cable Entry Size: Min Cable Entry Size: Max Operating Temperature: Min Operating Temperature: -50°C

4.5mm 4mm +80°C

Max Panel Thickness: 4.7mm Rohs Compliant: Yes

// Product 3D CAD Model Links

PXEB5410MM40453D CAD Model 5000 Series Expanded Beam Product.

// Product PDF Links