

# PXEB5412B002 Datasheet



## Product Name // 4 Channel Jam Nut to LC Connector **Cable Assembly**





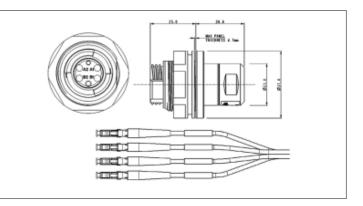

#### // Product Description:

- 0 A Terminated Jam Nut Bulkhead (JNBH) Connector with 4 (OM1) LC terminated independent cables - 2m Long Cable Assembly
- 0 Designed to MIL-DTL83526D
- 0 Compatible with any connector that follows MIL-DTL83526D
- 0 Dust Cap for all Connectors & Jam Nut Lanyard Included
- 0 Mates with Plug Connectors (hermaphroditic)
- 0 Operating Temperature -50°C to +80°C
- 0 Available in 2 Channel
- $\bigcirc$ Available in Jam Nut to SC Cable Assembly

### **General Information:**

**Product Display Title:** 4 Channel Jam Nut to LC Connector Cable Assembly

Circular Fiber Connectors **Product Family:** 5000 Series Expanded Beam **Product Series:** 

Max Insertion Loss: <2dR Avg Insertion Loss: <1.5dB

**Body Colour:** Dark Grey **Body Material:** 

Polycarbonate/Polybutylene Terephthalate (PC/PBT) **Body Material Type:** Plastic Body

Contact Type: Expanded Beam Coupling Nut Retention Force: 1Nm

Screw Coupling Type: Diameter Over Coupling Ring Mm: 30mm Fibre Mode: OM1

Flamability Rating: UL94V-0 EB Jam Nut to LC Double Ended Fiber Cable Function:

Ip Rating: **IP68** Material Finish: Matt

Max Operating Temperature: +80°C Min Operating Temperature: Max Panel Thickness: **Rohs Compliant:** 

-50°C 4.7mm Yes

#### // Product PDF Links



// Product 3D CAD Model Links



