
PXEB5412B005 Datasheet



Product Name // 4 Channel Jam Nut to LC Connector Cable Assembly





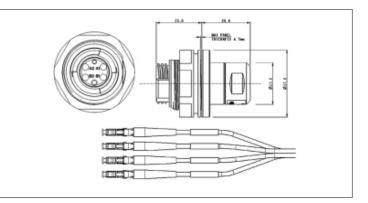

// Product Description:

- A Terminated Jam Nut Bulkhead (JNBH) Connector with 4 (OM1)
 LC terminated independent cables 5m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Jam Nut Lanyard Included
- O Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- Available in Jam Nut to SC Cable Assembly

// General Information:

Product Display Title: 4 Channel Jam Nut to LC Connector Cable Assembly

Product Family: Circular Fiber Connectors
Product Series: 5000 Series Expanded Beam

Max Insertion Loss: <2dB
Avg Insertion Loss: <1.5dB

Body Colour: Dark Grey
Body Material: Polycarbo

Body Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Contact Type: Expanded Beam
Coupling Nut Retention Force: 1Nm

Coupling Type: Screw
Diameter Over Coupling Ring Mm: 30mm
Fibre Mode: OM1

Fibre Mode: OM1
Flamability Rating: UL94V-0
Function: EB Jam N

Function: EB Jam Nut to LC Double Ended Fiber Cable Ip Rating: IP68

Material Finish: Matt

Material Finish:MattMax Operating Temperature:+80°CMin Operating Temperature:-50°CMax Panel Thickness:4.7mmRohs Compliant:Yes

// Product PDF Links // Product 3D

5000 Series Expanded Beam Product...

// Product 3D CAD Model Links