
## PXEB5412C001 Datasheet

# 

### Product Name // 4 Channel Jam Nut to LC Connector

#### 🚯 View Product Page

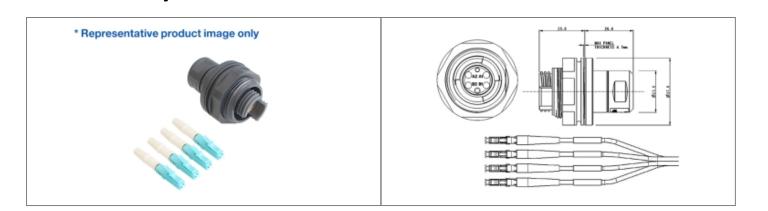

#### // Product Description:

**Cable Assembly** 

- A Terminated Jam Nut Bulkhead (JNBH) Connector with 4 (OM3)
  LC terminated independent cables 1m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Jam Nut Lanyard Included
- O Mates with Plug Connectors (hermaphroditic)
- O Operating Temperature -50°C to +80°C
- O Available in 2 Channel
- O Available in Jam Nut to SC Cable Assembly

#### // General Information:

Product Display Title:
Product Family:
Product Series:
Max Insertion Loss:
Avg Insertion Loss:
Body Colour:
Body Material:
Body Material Type:
Contact Type:
Coupling Nut Retention Force:
Coupling Type:
Diameter Over Coupling Ring Mm:
Fibre Mode:
Flamability Rating:
Function:
Ip Rating:
Material Finish:
Max Operating Temperature:
Min Operating Temperature:
Max Panel Thickness:
Rohs Compliant:
nons compliant.

#### 4 Channel Jam Nut to LC Connector Cable Assembly **Circular Fiber Connectors** 5000 Series Expanded Beam <2dB <1.5dB Dark Grey Polycarbonate/Polybutylene Terephthalate (PC/PBT) Plastic Body Expanded Beam 1Nm Screw 30mm OM3 UL94V-0 EB Jam Nut to LC Double Ended Fiber Cable IP68 Matt +80°C -50°C 4.7mm Yes

#### // Product PDF Links

5000 Series Expanded Beam Product...

// Product 3D CAD Model Links

PXEB5412C0013D CAD Model