PXEB5412C005 Datasheet




Product Name // 4 Channel Jam Nut to LC Connector Cable Assembly







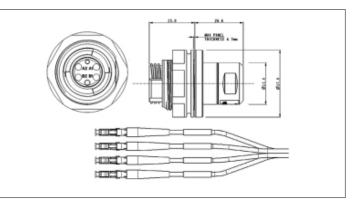

// Product Description:

- A Terminated Jam Nut Bulkhead (JNBH) Connector with 4 (OM3)
 LC terminated independent cables 5m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Jam Nut Lanyard Included
- O Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- Available in Jam Nut to SC Cable Assembly

// General Information:

Product Display Title: 4 Channel Jam Nut to LC Connector Cable Assembly

Product Family: Circular Fiber Connectors
Product Series: 5000 Series Expanded Beam

Max Insertion Loss: <2dB
Avg Insertion Loss: <1.5dB

Body Colour: Dark Grey
Body Material: Polycarbo

Body Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Contact Type: Expanded Beam
Coupling Nut Retention Force: 1Nm

Coupling Type:ScrewDiameter Over Coupling Ring Mm:30mmFibre Mode:OM3

Fibre Mode: OM3
Flamability Rating: UL94V-0
Function: EB Jam Nut to LC Double Ended Fiber Cable

Ip Rating:

Material Finish:

Mat Max Operating Temperature:

Helicolor Hin Operating Temperature:

Max Panel Thickness:

4.7mm

Rohs Compliant:

Yes

// Product PDF Links



// Product 3D CAD Model Links

