
PXEB5413B002 Datasheet



Product Name // 4 Channel Jam Nut to SC Connector Cable Assembly





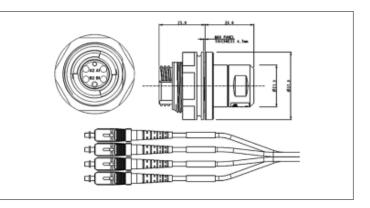

// Product Description:

- A Terminated Jam Nut Bulkhead (JNBH) Connector with 4 (OM1) SC terminated independent cables - 2m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Jam Nut Lanyard Included
- O Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- Available in Jam Nut to LC Cable Assembly

// General Information:

Product Display Title: 4 Channel Jam Nut to SC Connector Cable Assembly

Product Family: Circular Fiber Connectors
Product Series: 5000 Series Expanded Beam

Product Series:5000 Series Expanded BeamMax Insertion Loss:<2dB</td>

Avg Insertion Loss:<1.5dB</th>Body Colour:Dark GreyBody Material:Polycarbo

ody Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type:Plastic BodyContact Type:Expanded BeamCoupling Nut Retention Force:1Nm

Coupling Type: Screw
Diameter Over Coupling Ring Mm: 30mm

Fibre Mode: OM1
Flamability Rating: UL94V-0
Function: EB Jam Nut to SC Double Ended Fiber Cable

Ip Rating:IP68Material Finish:MattMax Operating Temperature:+80°CMin Operating Temperature:-50°C

Max Operating Temperature:+80°CMin Operating Temperature:-50°CMax Panel Thickness:4.7mmRohs Compliant:Yes

// Product 3D CAD Model Links

5000 Series Expanded Beam Product... PXEB5413B0023D CAD Model

// Product PDF Links