
PXEB5413C001 Datasheet



Product Name // 4 Channel Jam Nut to SC Connector Cable Assembly

View Product Page



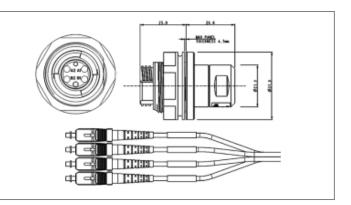

// Product Description:

- A Terminated Jam Nut Bulkhead (JNBH) Connector with 4 (OM3)
 SC terminated independent cables 1m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Jam Nut Lanyard Included
- O Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- O Available in Jam Nut to LC Cable Assembly

// General Information:

Product Display Title: 4 Channel Jam Nut to SC Connector Cable Assembly

Product Family: Circular Fiber Connectors
Product Series: 5000 Series Expanded Beam

Product Series: 5000 Series Expanded Bean Max Insertion Loss: <2dB

Avg Insertion Loss:<1.5dB</th>Body Colour:Dark GreyBody Material:Polycarbo

Body Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Contact Type: Expanded Beam
Coupling Nut Retention Force: 1Nm

Coupling Type: Screw
Diameter Over Coupling Ring Mm: 30mm
Fibre Mode: OM3

Fibre Mode: OM3
Flamability Rating: UL94V-0
Function: EB Jam Nut to SC Double Ended Fiber Cable

Ip Rating: IP68
Material Finish: Matt

Max Operating Temperature: +80°C
Min Operating Temperature: -50°C
Max Panel Thickness: 4.7mm
Rohs Compliant: Yes

// Product PDF Links

5000 Series Expanded Beam Product...

// Product 3D CAD Model Links

PXEB5413C0013D CAD Model