
## PXEB5413C002 Datasheet



## Product Name // 4 Channel Jam Nut to SC Connector Cable Assembly

View Product Page



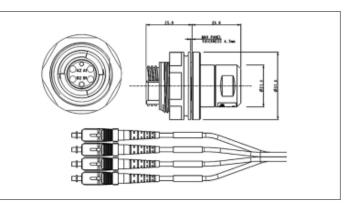

## // Product Description:

- A Terminated Jam Nut Bulkhead (JNBH) Connector with 4 (OM3)
   SC terminated independent cables 2m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Jam Nut Lanyard Included
- O Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- O Available in Jam Nut to LC Cable Assembly

## // General Information:

Product Display Title: 4 Channel Jam Nut to SC Connector Cable Assembly

Product Family: Circular Fiber Connectors
Product Series: 5000 Series Expanded Beam

Product Series: 5000 Series Expanded Bean Max Insertion Loss: <2dB

Avg Insertion Loss:<1.5dB</th>Body Colour:Dark Grey

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body

Body Material Type:Plastic BodyContact Type:Expanded BeamCoupling Nut Retention Force:1Nm

 Coupling Type:
 Screw

 Diameter Over Coupling Ring Mm:
 30mm

Fibre Mode: OM3
Flamability Rating: UL94V-0

Function: EB Jam Nut to SC Double Ended Fiber Cable Ip Rating: IP68

Material Finish:

Max Operating Temperature:

H80°C

Min Operating Temperature:

-50°C

Max Panel Thickness:

4.7mm

// Product PDF Links

5000 Series Expanded Beam Product...

**Rohs Compliant:** 

// Product 3D CAD Model Links

Yes

PXEB5413C0023D CAD Model