
# PXEB5413C005 Datasheet

## Product Name // 4 Channel Jam Nut to SC Connector

### 🚯 View Product Page

<u>bulg</u>in



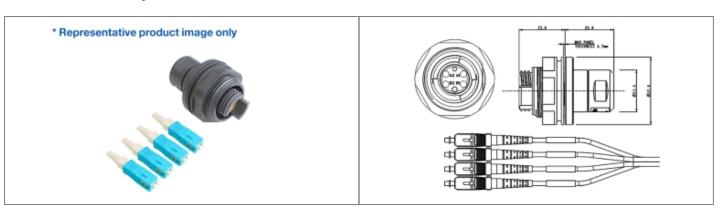

#### // Product Description:

- A Terminated Jam Nut Bulkhead (JNBH) Connector with 4 (OM3)
  SC terminated independent cables 5m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Jam Nut Lanyard Included
- O Mates with Plug Connectors (hermaphroditic)
- O Operating Temperature -50°C to +80°C
- O Available in 2 Channel
- O Available in Jam Nut to LC Cable Assembly

#### // General Information:

Product Display Title:
Product Family:
Product Series:
Max Insertion Loss:
Avg Insertion Loss:
Body Colour:
Body Material:
Body Material Type:
Contact Type:
Coupling Nut Retention Force:
Coupling Type:
Diameter Over Coupling Ring Mm:
Fibre Mode:
1 0 0
Fibre Mode:
Fibre Mode: Flamability Rating:
Fibre Mode: Flamability Rating: Function:
Fibre Mode: Flamability Rating: Function: Ip Rating:
Fibre Mode: Flamability Rating: Function: Ip Rating: Material Finish:
Fibre Mode: Flamability Rating: Function: Ip Rating: Material Finish: Max Operating Temperature:
Fibre Mode: Flamability Rating: Function: Ip Rating: Material Finish: Max Operating Temperature: Min Operating Temperature:

4 Channel Jam Nut to SC Connector Cable Assembly **Circular Fiber Connectors** 5000 Series Expanded Beam <2dB <1.5dB Dark Grey Polycarbonate/Polybutylene Terephthalate (PC/PBT) Plastic Body Expanded Beam 1Nm Screw 30mm OM3 UL94V-0 EB Jam Nut to SC Double Ended Fiber Cable IP68 Matt +80°C -50°C 4.7mm Yes

#### // Product PDF Links

5000 Series Expanded Beam Product...

// Product 3D CAD Model Links

PXEB5413C0053D CAD Model