
PXEB5420MM Datasheet



Product Name // 4 Channel Flange Mount Bulkhead Connector





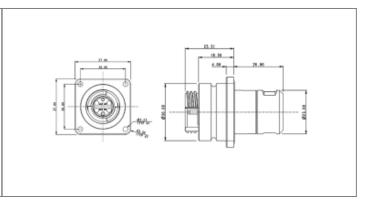

// Product Description:

- Non-terminated Flange Mount Bulkhead Connector for 4 Multimode patch leads
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & OM3
- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- O Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 2 Channel
- O Cable Assembly Available

// General Information:

Product Display Title: 4 Channel Flange Mount Bulkhead Connector

Product Family: Circular Fiber Connectors

Product Series: 5000 Series Expanded Beam

Product Series:5000 Series Expanded BeamMax Insertion Loss:<2dB</td>Avg Insertion Loss:<1.5dB</td>

Body Colour:Dark GreyBody Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Contact Type: Expanded Beam Coupling Type: Screw

Diameter Over Coupling Ring Mm: 30mm
Fibre Mode: MM

Flamability Rating: UL94V-0
Function: EB Flange Mount Bulkhead Connector

Ip Rating: IP68

Material Finish: Matt

Matt Max Operating Temperature: +80°C
Min Operating Temperature: -50°C
Rohs Compliant: Yes

// Product PDF Links



// Product 3D CAD Model Links

